

Mod.	130	270	370	440	530	625	925	1160	1365	2100
Capacità (litri) Capacity (litres)	130	270	370	440	530	625	925	1160	1365	2100
Dimensioni (L x P x H cm) Dimensions (W x D x H cm)	53 x 64 x 84	60 x 65 x 164	60 x 60 x 192	60 x 70 x 192	72 x 70 x 207	72 x 80 x 207	120 x 70 x 192	144 x 70 x 207	144 x 80 x 207	216 x 80 x 207
Finitura esterna External finishing	W / S	W / S	W / S	W / S	W / S	W / S	W / S	W / S	W / S	W / S
Finitura interna Internal finishing	W / S	W / S	W / S	W / S	W / S	W / S	W / S	W / S	W / S	W / S
Isolamento (mm) Insulation (mm)	40	50	50	50	60	60	50	60	60	
Rullini Rollers		4								
Piedi Feet	4		4	4	4	4	4	4	4	6
Porta isolata Insulated door	1	1	1	1	1	1	2	2	2	3
Illuminazione interna Internal lighting	•	•	•	•	•	•	•	•	•	•
Ripiani Shelves	2	2	3	3	3	3	6	6	6	9
Termostato elettronico con allarme Thermostat with alarm	•	•	•	•	•	•	•	•	•	•
Pannello di controllo PRO Control panel PRO	• PRO	• PRO	• PRO	• PRO	• PRO	• PRO	• PRO	• PRO	• PRO	• PRO
Refrigerazione ventilata Forced air refrigeration	•	•	•	•	•	•	•	•	•	•
Sbrinamento automatico Automatic defrosting	•	•	•	•	•	•	•	•	•	•
Refrigerante Refrigerant	R134A	R404A	R404A	R404A	R404A	R404A	R404A	R404A	R404A	R404A
Voltaggio (V/ph/Hz) Voltage (V/ph/Hz)	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50

W = Bianco / White / Blanc / Weiß      S = Acciaio inox / Stainless steel / Acier inox / Edelstahl

UK Distributor:

**QED Scientific Ltd.**

Ringstones Industrial Estate, Whaley Bridge, High Peak SK23 7PD

Tel: 01663 735494 Fax: 01663 732744 Web: [www.qedscientific.co.uk](http://www.qedscientific.co.uk)

Laboratory refrigerators



**EVERmed**  
MEDICAL REFRIGERATION

EVERmed s.r.l

Via Aldo Moro n°25 46020 Pegognaga (MN) - Italy

Telef. +39-0376-550828 Telefax +39-0376-550831 <http://www.evermed.it> mail: [evermed@evermed.it](mailto:evermed@evermed.it)

LR Models 0°+15°

**EVERmed**  
MEDICAL REFRIGERATION

\*La ditta fornitrice si riserva il diritto di apportare ai propri prodotti quelle modifiche tecniche e stilistiche che riterrà necessarie o utili senza pregiudicare le caratteristiche essenziali. \*Should it be necessary or useful without undermining any model essential features, technical and stylistic characteristics are subject to be changed without manufacturer's previous notice. \*La Maison constructrice se réserve le droit d'opérer sans préavis toutes modifications techniques et stylistiques qu'elle considèrera nécessaires ou utiles sans compromettre les caractéristiques essentielles des produits. \*Der Hersteller behält sich das Recht vor, alle technischen und das Aussehen betreffenden Änderungen vorzunehmen, die er für nützlich oder nötig hält, ohne die wesentlichen Merkmale der Erzeugnisse zu ändern.



LR 130 W



LR 270 W



LR 370 W



LR 440 W




LR 530 W



LR 625 W



LR 1160 W

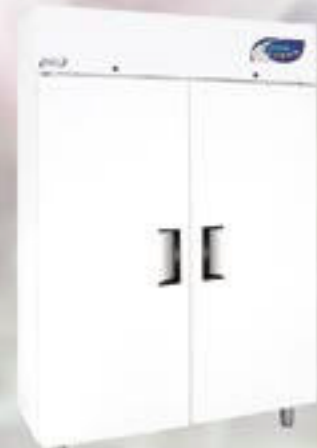

LR 1365 W



LR 2100 W



The standard controller offers a digital read-out and programming of the internal temperature. The digital display has bright red digits and 4 switches to allow control and regulation of the working conditions. Among the various functions are included a visual and acoustic alarm to alert users to excessive temperature deviations as well as a self-testing function to detect defective sensors.



The PRO control panel is an innovative concept of refrigerator control having a large LCD display, rear-illuminated in white with black digits, to constantly monitor the internal temperature with an accuracy of 0.5C. This also monitors the appliance working status (compressor running, defrosting, etc). The 4 soft touch buttons allow complete control of the various menu settings; this also signals 8 different alarm conditions (high & low temperature, door ajar, power failure, battery discharged, condenser dirty and sensor failure) and guarantees the maximum level of security for the stored products, alerting the user even in power-outage situations thanks to the battery backup. Total security is completed with keyed password protection (with automatic activation) to avoid tampering and offering remote signalling of the alarm through NO/NC contacts or RS485 port (optional software required). The system also offers testing and muting (with automatic re-activation) facilities for the alarms. An internal memory for events and alarms gives complete traceability.



LR 925 W

The LR refrigerators series, available in 2 different finishing materials, steel epoxy coated white colour or stainless steel and with models having capacities from 130 to 2100 litres, have distinctive featured insulated doors to give the maximum insulation capability. Two levels for the controls are available, standard and PRO, both microprocessor operating but with different security levels. All the models of this series have open wire shelves, mounted on anti-tilt slides and offer the opportunity to fit drawers without any modification. The internal temperature is always guaranteed by the forced-air refrigeration, with low noise cooling units, reliable and functioning with environmentally friendly refrigerant gas.

Also Available:  
Full range of laboratory freezers,  
incubators, ovens and stability cabinets.



Models with  
triple-glazed  
doors available  
(MPR series)

**Factory fitted options include** chart recorders, drawers and lockable wheels

**Installation and commissioning** facilities are available. Please call for details.